



Cleaning the Ink Revolvers


Summary: How to clean the ink revolvers

Applicable Products: iJetColor

Tools/Parts Required: Distilled/deionized water, foam swabs

The Cleaning the Ink Revolver Couplings


We recommend that the ink revolver couplings be cleaned every time that the printhead is removed. This helps to eliminate the possibility that ink will dry in the coupling and lead to leakage. This process should be performed just before a printhead cartridge is installed or re-installed.

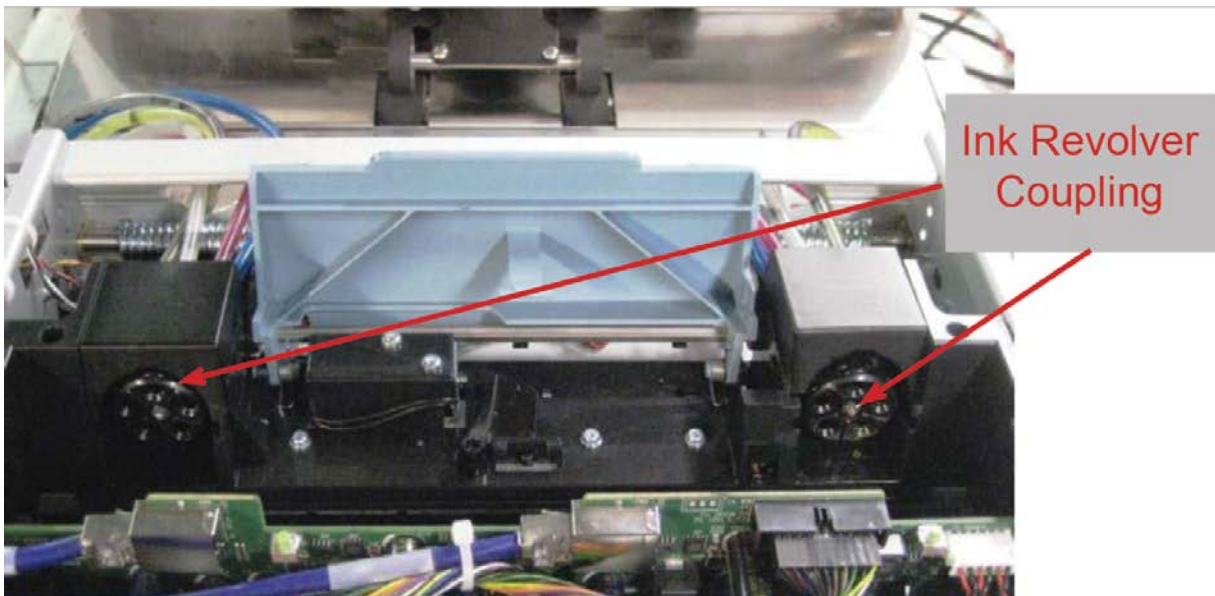

1. Lightly moisten a foam swab with **distilled or de-ionized** water.



2. Insert the swab into one of the ink channel holes and rotate the swab to clean the chamber.

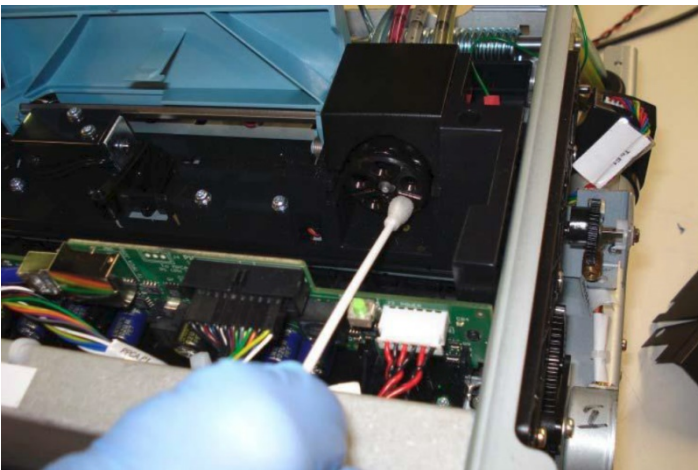

3. Use a new clean swab for each of the remaining ink channels, until all 10 openings are clean. (5 on each side.)